

LIGHTBOX SPECIFICATION

Frame specification

- 65mm deep aluminium profile.
- Satin anodised silver finish as standard - Option to powder coat to any RAL colour.
- Complete with 3mm Aluminium composite back panel for LED mounting.
- Suitable for **large, bespoke sizes**
- Can be manufactured in sections and supplied with joining bars for shipping and easy on-site assembly to take 1 x Fabric print.
- Can accept a non-illuminated fabric graphic to the reverse side.

Standard Illumination


- IP20 rated LED Strips
- 30 LEDs per metre
- Colour: Pure White
- Colour temperature: 5800 – 6300K
- Operating Voltage: 12V DC
- Power Supply: Internal to the box
- Luminous Flux: Approx. 3750 per square metre
- Power consumption: 44W per square metre
- Further LED options available on request

Fixing recommendation

- Suitable for wall mounting
- Screw through back panel, taking care not to damage the LEDs

Graphic recommendations


- Suitable for a Fabric graphic with silicone edging to all four sides

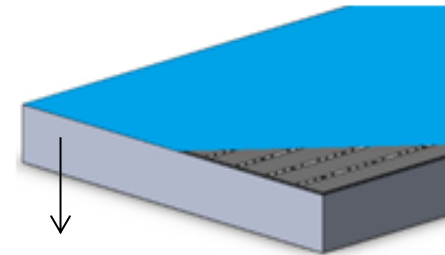


65mm deep Fabric-lite



Aluminium composite back panel
With IP20 rated LED Strips



65mm Fabric-lite section

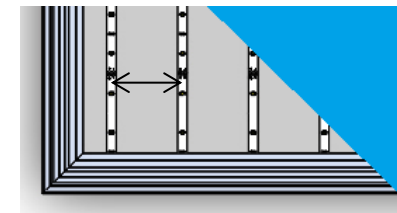

55mm LED spacing